



# Self-Clinching Studs

## Series CH, CHS & CHA




CH studs provide a strong flush-head assembly in material as thin as .040 in. (1.0 mm) with high torque-out and pushout performance.

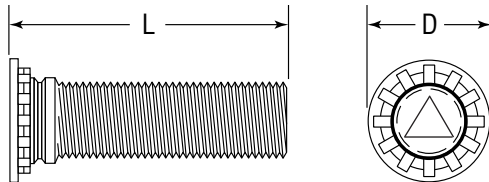

Part Number Structure:

CH 256-4

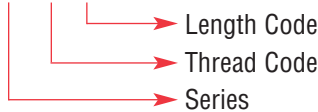

Series	Material	Finish
CH	Heat-treated Carbon Steel	Zinc* Clear
CHS	300 Series Stainless Steel	Passivated ASTM A967
CHA	2024-T4 Aluminum	None

\*See Finish Spec. on Page 6.

Thread: External 2A, ANSI B1.1 (6g ANSI/ASME B1.13M).\*\*

Use in: CH- Materials with HRB-80 or less.

CHS- Materials with HRB-70 or less.

CHA- Materials with HRB-50 or less.

\*\*See Note 3 on Page 6 for Gauging Spec.

### Dimensions & Specifications

INCH (in.)	Thread Size	Thread Code	L Length ±.015 in.										D ±.015	+ .003 - .000	Max.†† Rec. Nut Tight. Torque in.-lbs.	Min.	Min.
			.250	.312	.375	.500	.625	.750	.875	1.00	1.25	1.50					
	#2-56	256	-4	-5	-6	-8	-10	-12 <sup>†</sup>					.144	.085	2.5	.187	.040
	#4-40	440	-4	-5	-6	-8	-10	-12	-14	-16 <sup>†</sup>	-20		.176	.111	5	.219	.040
	#6-32	632	-4	-5	-6	-8	-10	-12	-14	-16	-20	-24 <sup>†</sup>	.206	.137	10	.250	.040
	#8-32	832	-4	-5	-6	-8	-10	-12	-14	-16	-20	-24 <sup>†</sup>	.237	.163	15	.281	.040
	#10-24	1024		-5 <sup>†</sup>	-6	-8	-10	-12	-14	-16	-20	-24 <sup>†</sup>	.256	.189	25	.281	.040
	#10-32	1032		-5 <sup>†</sup>	-6	-8	-10	-12	-14	-16	-20	-24	.256	.189	30	.281	.040
	1/4-20	420			-6	-8	-10	-12	-14	-16	-20	-24	.337	.249	55	.312	.062
	5/16-18	518				-8	-10	-12	-14	-16	-20	-24	.376	.311	115	.375	.093

† Not stocked, available on special order.

†† For aluminum studs, values are 60% of those listed.

### Dimensions & Specifications

METRIC (mm)	Thread Size	Thread Code	L Length ±.4 mm													D ±.4	+ .08 - .00	Max.†† Rec. Nut Tight. Torque N•m	Min.	Min.
			6	8	10	12	15	18	20	22	25	28	30	35	38					
	M2.5x0.45	M2.5	-6 <sup>†</sup>	-8 <sup>†</sup>	-10 <sup>†</sup>	-12 <sup>†</sup>	-15 <sup>†</sup>	-18 <sup>†</sup>								4.1	2.5	3.1	5.4	1.0
	M3x0.5	M3	-6 <sup>†</sup>	-8	-10	-12	-15	-18	-20	-22	-25					4.6	3.0	3.6	5.6	1.0
	M3.5x0.6	M3.5	-6	-8	-10	-12	-15	-18	-20	-22	-25	-28	-30			5.3	3.5	4.1	6.4	1.0
	M4x0.7	M4	-6 <sup>†</sup>	-8	-10	-12	-15	-18	-20	-22	-25	-28	-30	-35	-38	5.9	4.0	4.6	7.2	1.0
	M5x0.8	M5		-8 <sup>†</sup>	-10	-12	-15	-18	-20	-22	-25	-28	-30	-35	-38	6.5	5.0	5.6	7.2	1.0
	M6x1.0	M6			-10	-12	-15	-18	-20	-22	-25	-28	-30	-35	-38	8.2	6.0	6.6	7.9	1.6
	M8x1.25	M8				-12 <sup>†</sup>	-15	-18	-20	-22	-25	-28	-30	-35	-38	9.6	8.0	9.6	9.6	2.4


Note: Studs are available in lengths up to 3 in. (76.2 mm) upon special order for 1/4-20/M6 and larger.

Continued on next page.



# Self-Clinching Studs

## Series CH, CHS & CHA

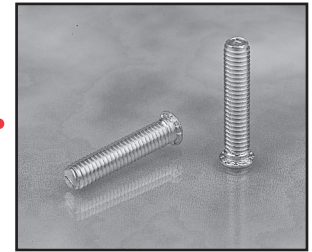


Continued from previous page.

### TOOLING

#### Note 1.


For material thickness of .059 in. or less, a countersunk hole is needed in the anvil.

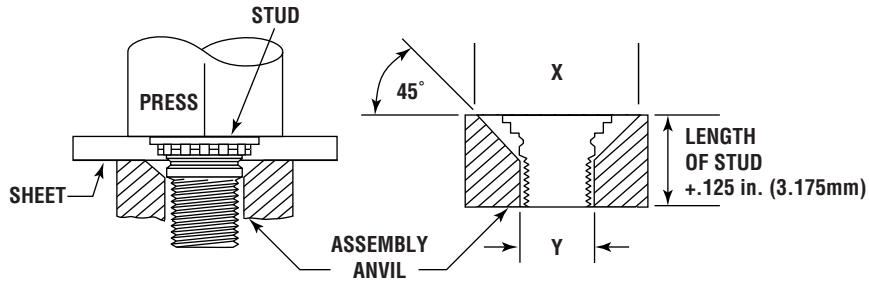

Tooling for sheet thickness .059 in. (1.51mm) and less with #2 (M2.5) thru #10 (M5) thread sizes and less than .093 in. (2.3mm) for 1/4 in. (M6) threads.

#### Note 2.

For material thickness of .060 in. or more, a through-hole is needed in the anvil.

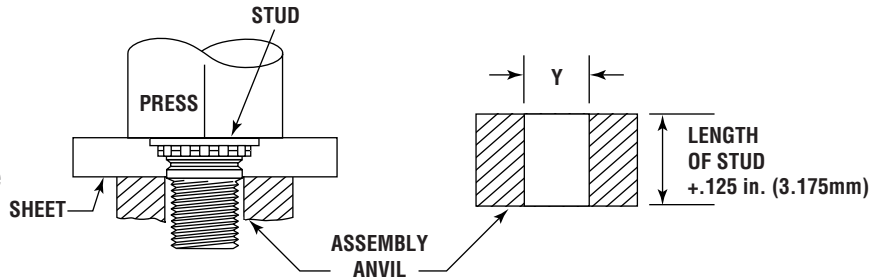


Tooling for sheet thickness .060 in. (1.51mm) minimum and greater with #2 (M2.5) thru #10 (M5) thread sizes and .092 in. (2.3mm) minimum and greater for 1/4 in. (M6) and 5/16 in. (M8) threads.

Thread Code	Anvil Dimensions (in.)	
	X +.004	Y +.003
256	.110	.087
	.114	.090
440	.136	.113
	.140	.116
632	.162	.139
	.166	.142
832	.188	.165
	.192	.168
1024	.216	.191
	.220	.194
1032	.216	.191
	.220	.194
420	.295	.250
	.300	.253
518	—	.3125
	—	.3155


Thread Code	Anvil Dimensions (mm)	
	X +.1	Y +.08
M2.5	3.1	2.50
M3	3.6	3.00
M3.5	4.1	3.50
M4	4.6	4.00
M5	5.6	5.00
M6	6.6	6.00
M8	—	8.00

Continued on next page.

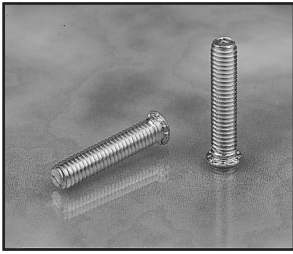

# Self-Clinching Studs






## Series CH, CHS & CHA



Continued from previous page.

Note: Values based on stainless steel studs (steel stud values may be higher).

### Installation & Performance Data

					
	<b>Thread Code</b>	<b>Sheet Thickness &amp; Material</b>	<b>Installation Force (lbs.)</b>	<b>Pushout (lbs.)</b>	<b>Torque-out (in.-lbs.)</b>
<b>INCH (in.)</b>	256	.062 Aluminum	2000	100	5
		.060 Steel	2500	180	5
	440	.064 Aluminum	3800	170	10
		.060 Steel	4300	275	10
	632	.064 Aluminum	3800	180	17
		.060 Steel	4700	300	20
	832	.064 Aluminum	4800	220	28
		.060 Steel	6800	375	40
	1024	.064 Aluminum	5500	270	30
	1032	.060 Steel	6800	440	60
420	.093 Aluminum	6500	310	65	
	.088 Steel	9500	575	100	
518	.093 Aluminum	6500	430	100	
	.093 Steel	10000	650	175	
	<b>Thread Code</b>	<b>Sheet Thickness &amp; Material</b>	<b>Installation Force (kN)</b>	<b>Pushout (N)</b>	<b>Torque-out (N•m)</b>
<b>METRIC (mm)</b>	M2.5	1.6 Aluminum	8.9	465	1.0
		1.5 Steel	11.1	740	1.0
	M3	1.6 Aluminum	12.9	600	1.7
		1.5 Steel	14.7	820	1.7
	M3.5	1.6 Aluminum	15.6	800	1.7
		1.5 Steel	22.3	1335	2.8
	M4	1.6 Aluminum	20.0	975	2.9
		1.5 Steel	28.9	1780	4.2
	M5	1.6 Aluminum	24.5	1070	3.5
		1.5 Steel	33.4	2000	6.5
	M6	2.4 Aluminum	28.9	1660	7.3
		2.2 Steel	44.5	2560	11.3
	M8	2.4 Aluminum	29.8	1910	11.3
		2.2 Steel	44.5	2890	19.2