

captive®

fastener corporation

19 Thornton Road, Oakland, New Jersey, USA 07436
Telephone: (201) 337-6800 FAX: (201) 337-1012
Web Site: www.captive-fastener.com

Tech Bulletin
Thread Mask LM-1293®


THREAD MASK LM1293®

We can provide LM1293® applied to our fasteners, which provides an excellent method of protecting threads during the painting process. This product eliminates the cost of masking each fastener individually prior to the painting process and it eliminates the possibility of some fasteners not being protected prior to painting.

The paint is easily removed when a torque is applied to the mating fastener. An additional benefit that this coating provides is that it increases lubricity, which is especially beneficial when using stainless steel fasteners. The process will eliminate galling that can occur when two stainless steel fasteners are initially mated.

The service temperature range for this product is -65 degrees to 400 degrees Fahrenheit.

Joe Alderisio Jr.
Chief Engineer

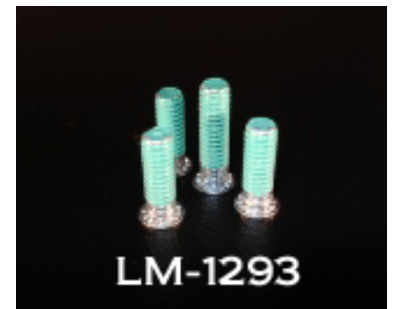

LM1293® is a registered trademark of ND Industries